



14W47

Description

15 Amp, 125 Volt, NEMA 5-15P, 2P, 3W, Plug, Straight Blade, Industrial Grade, Grounding, Wetguard - Yellow

Grounding: Grounding Feature: Wetguard

Amperage: 15 Amp Voltage: 125 Volt NEMA: 5-15P Pole: 2 Wire: 3 Cord Range: .375 - .655 Wire Gauge: 18-10 AWG

Blades/Contacts: Nickel-Plated Brass Body Material: EPTR Rubber Assembly Screws: Stainless Steel 300 Color: Yellow

Warranty: Lifetime Warranty

Product Features



NEMA: 5-15P




Features and Benefits

- · IEC IP66 and IP 67 Rated, in accordance with IEC 529 as evaluated by UL and CSA
- NEMA Type 4, 4X, 6 and 6P Ratings in accordance with UL 50 and CSA 94
- Outstanding resistance to wet and damp environments, extreme temperature variations, acids, alkalis, grease, oils and solvents
- Effective "tongue and groove" construction seals out water, moisture, dirt when plugs are mated with connectors

Standards and Certifications: UL/CSA

- Innovative strain-relief grips cables securely, keeps out water and moisture
- Cord clamp range: 18/3-10/3S0 (.375"-.655")
- · Non-magnetic stainless steel fast-threading assembly screws won't interfere with sensitive equipment
- Connector "hood" closure cap seals device when not in use
- Backed by a Limited 10-Year Warranty

Dimensional Diagram

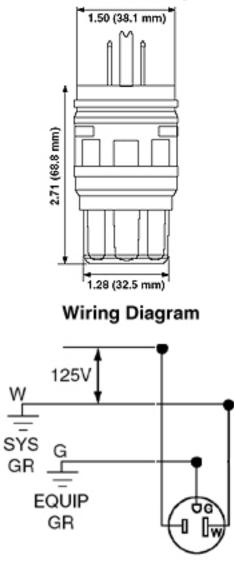



SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

Leviton Manufacturing Co., Inc.

59-25 Little Neck Parkway, Little Neck, NY 11362-2591 Telephone: 1-800-323-8920 · FAX: 1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

Leviton Manufacturing of Canada, Ltd. 165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: 1-800-469-7890 · FAX: 1-800 -824-3005

Leviton S. de R.L. de C.V. Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

©2007 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

