


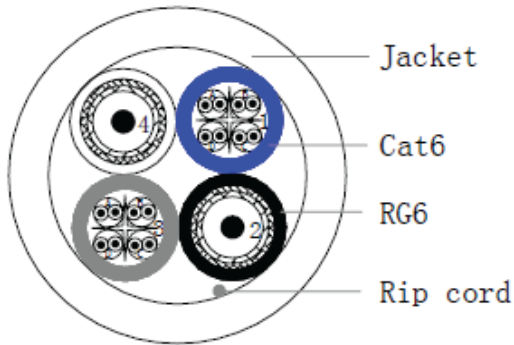

Electrical Performance

CAT6E UTP LAN CABLE	For details, please see Attachment 1
RG6 Quad Shield Coaxial Cable	For details, please see Attachment 2

Description

Two 4 Pair Cat6E UTP Cable
Complies to TIA 568-C.2
 23 Awg Solid Bare Copper Conductor / PE Insulation

Two RG6 Quad Shield Coaxial Cable
Complies to SCTE ISP-IP-001
 18 Awg Copper Clad Steel (CCS)
 Al foil / 60% Al-Mg alloy Braid Shield +
 Al foil / 40% Al-Mg alloy Braid Shield

Applicable Standards

For use in Home Network Systems
Reference Standard
 SCTE IPS-SP-001, TIA-568-C.2

Physical Characteristics

CAT6E UTP LAN CABLE	For details, please see Attachment 1
RG6 Quad Shield Coaxial Cable	For details, please see Attachment 2

Cable Marking

H26E26QMGN 2CAT6E 550MHZ + 2RG6U/18 AWG QUAD
 CMR/CATVR FT4 VERIFIED TO C(ETL)US XXXXXXXX CATV
 SWEPT TO 3.0 GHZ *** FT

Electrical Characteristics


CAT6E UTP LAN CABLE	For details, please see Attachment 1
RG6 Quad Shield Coaxial Cable	For details, please see Attachment 2

Mechanical Characteristics

Test Object			Outer Jacket
Test Material			PVC
Before	Tensile Strength	(Mpa)	>=1.034
Aging	Elongation	(%)	>=200
Aging Condition			113.0 ± 1.0 x 168
After	Tensile Strength	(Mpa)	>=85% unaged
Aging	Elongation	(%)	>=50% unaged
Cold Bend			(-20 ± 2°C x 4 hrs) No crack

Part Numbers

Part #	Color	Put-up
H26E26QMGN-2	Green	500' Reel

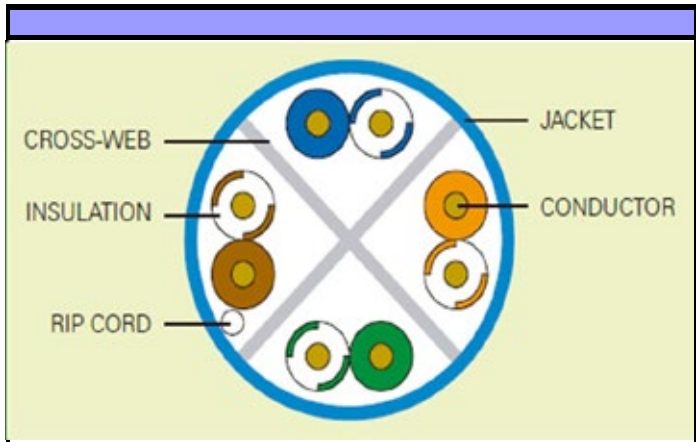

Description

23 AWG CAT6E CMR, High-Performance Data Cable

Applicable Standards

- ETL Listed Type CMR
- C(ETL) listed CMG FT4
- ETL Verified to TIA - 568-C.2, and ISO/IEC 11801
- ROHS Compliant
- ATM 155 Mbps
- Ethernet 10BASE-T, 100BASE-TX, 100BASE-VG, 100BASE-T4,
- 1000 Mbps 1000BASE-T Gigabit Ethernet™ (IEEE 802.3)
- 16 Mbps Token Ring™ (IEEE 802.5)

Physical Characteristics

Number of Conductor Pairs	4
Size	23 AWG
Stranding	Solid
Conductor Material	Solid Annealed Bare Copper
Shield Material	Unshielded
Rip Cord	Yes
Insulation Material	Polyethylene
Insulation Overall Diameter	0.040 in. ± 0.0002 in.
Insulation Average Thickness	0.0088 in.
Jacket	Flame Retardant PVC
Outer Jacket Average Wall Thickness	0.023 in.
Outer Jacket Nominal O.D.	0.244 in. ± 0.008 in.
Nominal Weight	30 lbs.

Mechanical Characteristics

Temperature Rating	Installation	0 to + 60°C
	Operating	-20°C to + 75°C
Tensile Strength	Before	> = 13.8 Mpa
Elongation	Aging	> = 100%
Aging Condition		100°C x 168 hours
	After	> = 85% of unaged
	Aging	> = 50% of unaged

Color Code

Pair 1	White / Blue	Blue
Pair 2	White / Orange	Orange
Pair 3	White / Green	Green
Pair 4	White / Brown	Brown

Electrical Performance

Frequency (MHz)	Attenuation (dB/100m)	Return loss (dB)	NEXT (dB)	PS-NEXT (dB)
	Max.	Min.	Min.	Min.
1	2.0	20.0	77.3	75.3
4	3.8	23.6	68.3	66.3
8	5.3	25.4	63.8	61.8
10	5.9	26.0	62.3	60.3
16	7.4	26.0	59.3	57.3
20	8.3	26.0	57.8	55.8
25	9.3	25.5	56.3	54.3
31.25	10.4	25.0	54.9	52.9
62.5	14.9	23.5	50.4	48.4
100	19.0	22.5	47.3	45.3
155	23.9	21.6	45.8	43.5
200	27.4	21.0	42.8	40.8
250	30.8	20.5	41.3	39.3
300	34.0	20.1	40.2	38.2
350	37.0	19.8	39.2	37.2
400	39.7	19.5	38.3	36.3
450	42.1	19.2	37.5	35.5
500	44.9	19.0	36.8	34.8
550	47.3	18.8	36.2	34.2
Frequency (MHz)	ELFEXT Min. (dB)	PS-ELFEXT Min. (dB)	ACR Min. (dB)	PS-ACR Min. (dB)
1	70.8	67.8	75.0	73.0
4	58.7	55.7	64.0	62.0
8	52.7	49.7	57.7	55.7
10	50.8	47.8	55.6	53.6
16	46.7	43.7	50.7	48.7
20	44.7	41.7	48.2	46.2
25	42.8	39.8	45.6	43.6
31.25	40.9	37.9	42.8	40.8
62.5	34.8	31.8	32.9	30.9
100	30.8	27.8	24.9	22.9
155	27.0	23.6	21.0	19.0
200	24.7	21.7	18.4	16.4
250	22.8	19.8	13.5	11.5
300	21.2	18.2	9.6	5.0
350	19.9	16.9	5.2	3.2
400	18.7	15.7	1.5	-
450	17.7	14.7	-	-
500	16.8	13.8	-	-
550	15.9	12.9	-	-


* Values above 250MHz are information only

Electrical Characteristics

Maximum Conductor DC Resistance @ 20°C	9.38 Ω / 100 Meters
Maximum DC Resistance Unbalanced @ 20°C	5%
Maximum Pair-to-Pair Ground Capacitance Unbalanced	330 pF / 100 Meters
Characteristic Impedance	100 ± 15 Ω
Mutual Capacitance	5.6 nF / 100 Meters
Maximum Delay Skew	40 nS / 100 Meters

Cable Marking

CATEGORY 6E 550MHZ 23AWG 4 PR UTP CMR C(ETL)US XXXXXXX FT4
ETL LISTED & VERIFIED TO TIA/EIA - 568B.2 ***FT

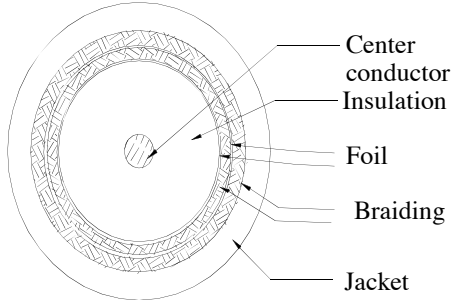

Electrical Performance

Frequency (MHz)	Attenuation (dB/100m)	Frequency (MHz)	Attenuation (dB/100m)
1	0.89	1000	22.00
10	2.90	1200	24.60
50	5.25	1450	27.20
100	7.20	1800	30.50
200	9.84	2200	32.80
400	14.10	2400	32.83
700	19.00	3000	37.88
900	21.00		

Description

RG-6/U QUAD CATV 75 Ω Coaxial Cable

Applicable Standards

Reference Standard

SCTE IPS-SP-001

UL 1655, UL 13, UL 444, ROHS

Physical Characteristics

Conductor		C.C.S.
AWG		18
Diameter	(inches)	0.04
Insulation		Skin Foamed PE
Nom. Thickness	(inches)	0.073
Insulation Diameter	(inches)	0.186
First Braid Shield		Aluminum
Coverage Area	(%)	60
Second Braid Shield		Aluminum
Coverage Area	(%)	40
Jacket		FR-PVC
Cable Diameter	(inches)	0.2968
Nom. Thickness	(inches)	0.0255

Cable Marking

RG6/U QUAD SHIELD 18AWG CMR FT4 VERIFIED TO C(ETL)US
XXXXXXX CATV SWEPT TO 3.0 GHZ ***FT

Electrical Characteristics

Temperature Rating	(°C)	-20 to 60
Impedance	(± 3.0 Ohms)	75
Capacitance	(pF/ft)	15.5
Conductor DCR@20° C	(ohms/1000ft)	28.6
Velocity of Propagation	(%)	84
ROHS Compliant		Yes