


# ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

Corning ALTOS® cable with FastAccess® technology is an all-dielectric gel-free cable designed for outdoor and limited indoor use for campus backbones in lashed aerial and duct installations. The innovative FastAccess technology feature combined with the all-dielectric gel-free loose tube design simplifies removal of the cable jacket reducing cable end access time by at least 50 percent. Equally important is the overall reduction in risk of inadvertent fiber damage and risk to installers from sharp cable access tools. The cable is fully waterblocked using craft-friendly, water-swellaable materials, which means no clean up is required. The flexible buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy mid-span access. The all-dielectric gel-free cable construction requires no bonding or grounding, and these cables have a medium-density polyethylene jacket that is rugged, durable and easy to handle. A variety of fiber types are available including 62.5  $\mu\text{m}$  and 50  $\mu\text{m}$ , single-mode and hybrid versions, as well as fibers with Gigabit and 10 Gigabit Ethernet performance.

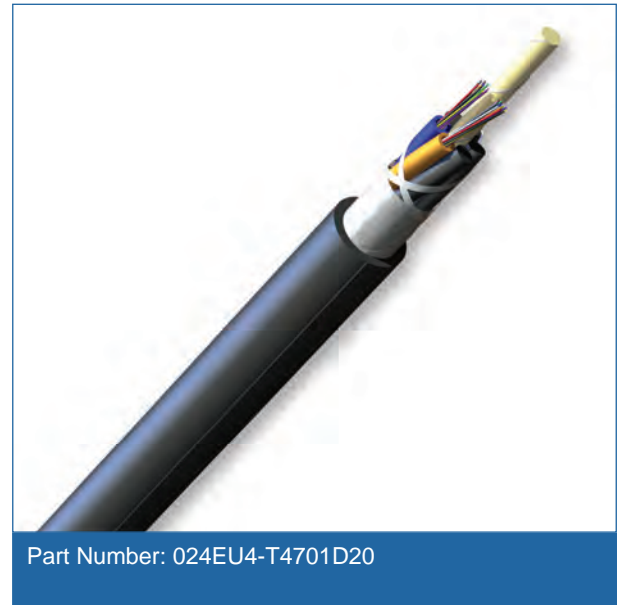

## Features and Benefits

### Contains FastAccess® technology

Innovative cable jacket feature reduces cable end access time, reduces overall risk of inadvertent fiber damage, as well as, risk to installers from sharp cable access tools

### Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

### Fully waterblocked loose tube all-dielectric gel-free design


Simple access and no clean up

### Industry-standard performance

Meets the requirements of Telcordia GR-20, Issue 3 and ICEA S-87-640

### Available in 62.5 $\mu\text{m}$ , 50 $\mu\text{m}$ , single-mode and hybrid versions

Ready for any application including Gigabit Ethernet and 10 Gigabit Ethernet

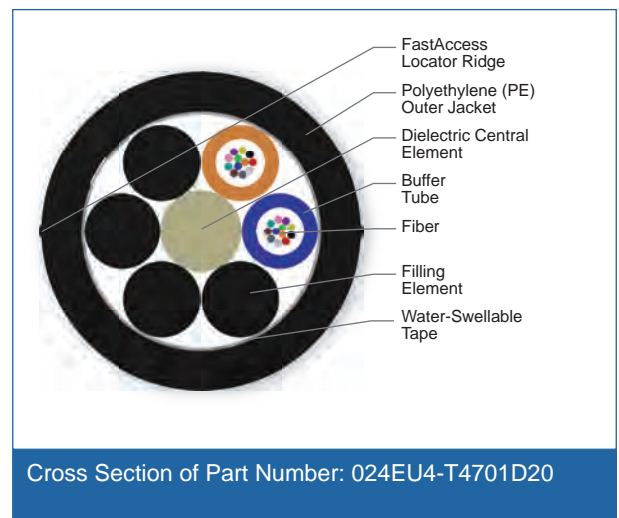

# ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

## Standards

**Common Installations** Outdoor lashed aerial and duct; indoor when installed according to National Electrical Code® (NEC®) Article 770

**Design and Test Criteria** ANSI/ICEA S-87-640

## Specifications

### General Specifications

|                |                   |
|----------------|-------------------|
| Environment    | Outdoor           |
| Application    | Aerial, Duct      |
| Cable Type     | Loose Tube        |
| Product Type   | Dielectric        |
| Fiber Category | Single-mode (OS2) |

### Temperature Range

|              |                                    |
|--------------|------------------------------------|
| Storage      | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | -30 °C to 70 °C (-22 °F to 158 °F) |
| Operation    | -40 °C to 70 °C (-40 °F to 158 °F) |

### Cable Design

|                            |  |
|----------------------------|--|
| Central Element            | Dielectric   |
| Fiber Count                | 24   |
| Fiber Coloring             | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Fibers per Tube            | 12   |
| Number of Tube Positions   | 6  |
| Number of Active Tubes     | 2  |
| Buffer Tube Color Coding   | Blue, Orange   |
| Buffer Tube Diameter       | 2.5 mm (0.1 in)  |
| Number of Filling Elements | 4  |
| Tape                       | Water-swellaable   |
| Outer Jacket Material      | Polyethylene (PE)  |

CORNING

# ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

## Cable Design

|                         |       |
|-------------------------|-------|
| Outer Jacket Color      | Black |
| Maximum Fibers per Tube | 12    |

## Mechanical Characteristics Cable

|                                   |                          |
|-----------------------------------|--------------------------|
| Max. Tensile Strength, Short-Term | 2700 N (600 lbf)         |
| Max. Tensile Strength, Long-Term  | 890 N (200 lbf)          |
| Weight                            | 73 kg/km (49 lb/1000 ft) |
| Nominal Outer Diameter            | 10.5 mm (0.41 in)        |
| Min. Bend Radius Installation     | 158 mm (6.2 in)          |
| Min. Bend Radius Operation        | 105 mm (4.1 in)          |

## Chemical Characteristics

|      |   |
|------|---|
| RoHS | Free of hazardous substances according to RoHS 2002/95/EG |
|------|---|

## Fiber Specifications

### Optical Characteristics (cabled)

|                         |                                   |
|-------------------------|-----------------------------------|
| Fiber Name              | Single-mode (OS2)                 |
| Fiber Category          | G.652.D                           |
| Fiber Code              | E                                 |
| Performance Option Code | 01                                |
| Wavelengths             | 1310 nm / 1383 nm / 1550 nm       |
| Maximum Attenuation     | 0.4 dB/km / 0.4 dB/km / 0.3 dB/km |

## Ordering Information

|                     |  |
|---------------------|--|
| Part Number         | 024EU4-T4701D20  |
| Product Description | ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology, 24 F, Single-mode (OS2) |
| EAN Code            | 4056418178271  |

CORNING

# ALTOS® Loose Tube, Gel-Free, All-Dielectric Cable with FastAccess® Technology

24 F, Single-mode (OS2)

CORNING

## Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING