

# FREEDM<sup>®</sup> Loose Tube, Gel-Free Cable, Plenum

48 F, Single-mode (OS2)

CORNING

Corning Cable Systems FREEDM<sup>®</sup> Loose Tube Gel-Free Plenum Cables are flame-retardant, indoor/outdoor, plenum-rated cables suitable for installation in interbuilding and intrabuilding backbones in aerial, duct and riser or plenum applications. The loose tube design offers mechanical ruggedness and environmental durability while the all-dielectric cable construction requires no grounding or bonding. The water-swellable yarn eliminates the need for gel-filling compound and allows more efficient and craft-friendly cable preparation. The 250 µm color-coded fibers allow quick and easy identification during installation.

The flexible, flame-retardant outer jacket is UV-resistant and enables direct exposure to sunlight. Interlocking armor is available for special applications requiring additional mechanical durability. The plenum rating of this cable eliminates the need to transition splice when entering the building and minimizes routing restrictions once inside the building. Meeting the requirements of the National Electrical Code<sup>®</sup> (NEC<sup>®</sup>) Article 770, the cables are also OFNP and FT-6 listed.

This cable is available in 12 different jacket colors - blue, orange, green, brown, slate, white, red, black, yellow, purple, rose and aqua. The colored jacket allows for easy visual identification of the cables while still providing all of the required environmental protection of an indoor/outdoor cable jacket. Black is the standard jacket color using the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

## Features and Benefits

### Gel-free waterblocking technology

Craft-friendly cable preparation

### Loose tube design

Stable performance and compatibility with all common fiber types

### Color-coded fibers



Quick and easy identification

### All-dielectric construction

Requires no grounding or bonding

### Meets NEC requirements

Meets burn test criteria

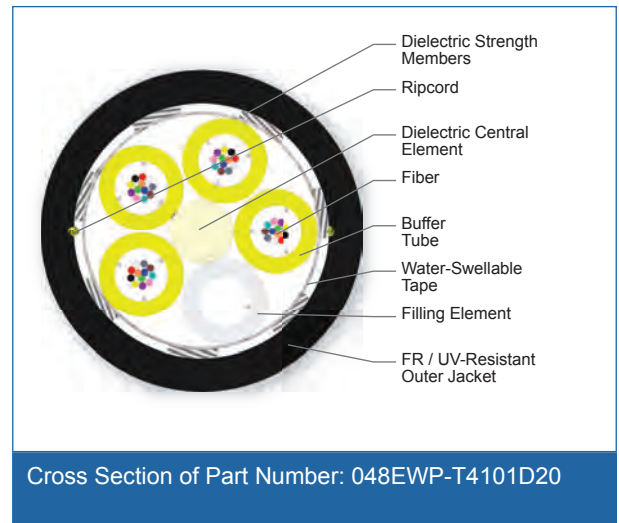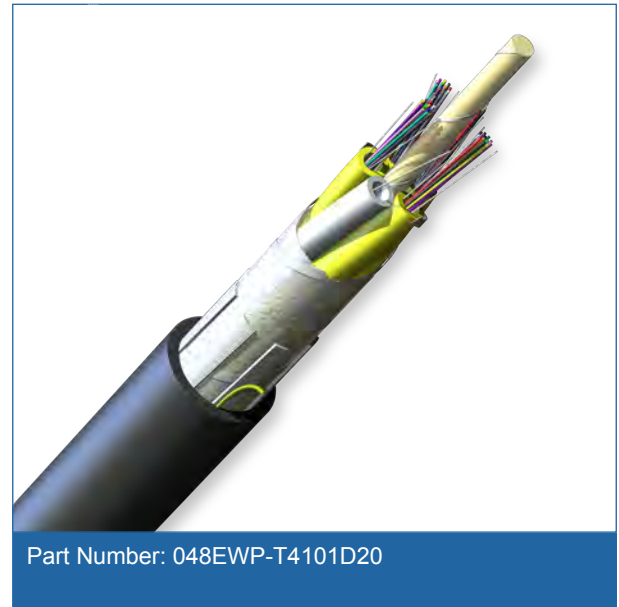

# FREEDM<sup>®</sup> Loose Tube, Gel-Free Cable, Plenum

48 F, Single-mode (OS2)

CORNING

## Standards

**Approval and Listings** National Electrical Code<sup>®</sup> (NEC<sup>®</sup>) OFNP, CSA FT-6

**Design and Test Criteria** ANSI/ICEA S-104-696; NFPA 262 (for plenum, riser and general building applications)

## Specifications

General Specifications	
Environment	Indoor/Outdoor Cables
Application	Aerial, Direct Buried, Duct, General Purpose Horizontal, (Vertical Riser, Plenum)
Cable Type	Loose Tube
Product Type	Dielectric
Flame Rating	Plenum (OFCP)
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	0 °C to 60 °C (32 °F to 140 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	48
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	5
Number of Active Tubes	4
Buffer Tube Color Coding	Yellow
Number of Filling Elements	1
Tape	Water-swellable
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Number of Ripcords	2

# FREEDM<sup>®</sup> Loose Tube, Gel-Free Cable, Plenum

48 F, Single-mode (OS2)



## Cable Design

Outer Jacket Material	Flame-Retardant, UV-Resistant
Outer Jacket Color	Black

## Mechanical Characteristics Cable

Weight	127 kg/km (85 lb/1000 ft)
Nominal Outer Diameter	11.1 mm (0.44 in)
Max. Tensile Strengths, Short-Term	2700 N (600 lbf)
Max. Tensile Strengths, Long-Term	810 N (180 lbf)
Min. Bend Radius Installation	167 mm (6.6 in)
Min. Bend Radius Operation	111 mm (4.4 in)

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

## Fiber Specifications

### Optical Characteristics (cabled)

Fiber Type	Single-mode
Fiber Core Diameter	8.2 $\mu$ m
Fiber Category	OS2
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Serial 1 Gigabit Ethernet	5000 m / - / -
Serial 10 Gigabit Ethernet	10000 m / - / 40000 m

\* ITU-T G.652 D compliant.

\* Meets 0.75 ns optical skew when used in all Corning Cable Systems Plug & Play™/Pretium EDGE® Systems Solutions.

- Notes:
- 1) Improved attenuation and bandwidth options available.
  - 2) Bend-insensitive single-mode fibers available on request.
  - 3) Contact a Corning Cable Systems Customer Care Representative for additional information.

# FREEDM<sup>®</sup> Loose Tube, Gel-Free Cable, Plenum

48 F, Single-mode (OS2)



## Ordering Information

Part Number	048EWP-T4101D20
Product Description	FREEDM <sup>®</sup> Loose Tube, Gel-Free Cable, Plenum, 48 F, Single-mode (OS2)



Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/cablesystems](http://www.corning.com/cablesystems)

A complete listing of the trademarks of Corning Cable Systems is available at [www.corning.com/cablesystems/trademarks](http://www.corning.com/cablesystems/trademarks).

Corning Cable Systems is ISO 9001 certified. © 2012 Corning Cable Systems. All rights reserved.