


TWO HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)

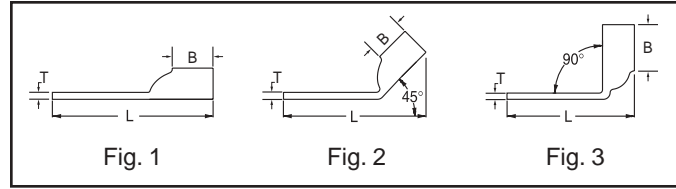

C-46

Catalog Number	Fig #	Conductor		Stud Hole Size	Stud Hole Spacing	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling				Wire Strip Length		
		AWG	*** MM ²				(B)	(T)	(L)		Mechanical		Hydraulic			Color Code	Die Index
											MD6, OUR840, MD7-34R	BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750				
YA1CL-2TC38	1			3/8"	1	.68"	.88"	.10"	3.07"	MY29-3 (1)							
YA1CL-2TC38-45	2		-	3/8"	1	.68"	.88"	.10"	2.96"	MY29-11 (1)							
YA1CL-2TC38-90	3			3/8"	1	.68"	.88"	.10"	2.17"	MRC840 (1) Y644M (1)	W1CVT (1)	X1CRT-1 (1)	U1CRT (1)	Green	11	15/16"	
YA25-2L	1			5/16"	7/8"	.75"	.88"	.12"	2.85"								
YA25-2L-45	2			5/16"	7/8"	.75"	.88"	.12"	2.77"								
YA25-2L-90	3			5/16"	7/8"	.75"	.88"	.12"	1.95"								
YA252LN	1			1/2"	1-3/4"	.83"	.88"	.11"	4.29"								
YA252LN-45	2			1/2"	1-3/4"	.83"	.88"	.11"	4.20"								
YA252LN-90	3			1/2"	1-3/4"	.83"	.88"	.11"	3.38"								
YA25L-2TC14	1			1/4"	5/8"	.75"	.88"	.12"	2.64"								
YA25L-2TC14-45	2			1/4"	5/8"	.75"	.88"	.12"	2.45"								
YA25L-2TC14-90	3			1/4"	5/8"	.75"	.88"	.12"	1.58"								
YA25L-2TC14E1	1			1 1/4"	1	.75"	.88"	.12"	3.01"								
YA25L-2TC14E1-45	2			1 1/4"	1	.75"	.88"	.12"	2.91"								
YA25L-2TC14E1-90	3			1 1/4"	1	.75"	.88"	.12"	1.95"								
YA25L-2TC14E2	1			1/4"	3/4"	.75"	.88"	.12"	2.66"								
YA25L-2TC14E2-45	2			1/4"	3/4"	.75"	.88"	.12"	2.58"								
YA25L-2TC14E2-90	3			1/4"	3/4"	.75"	.88"	.12"	1.70"								
YA25L-2TC38	1			3/8"	1	.75"	.88"	.12"	3.10"								
YA25L-2TC38-45	2			3/8"	1	.75"	.88"	.12"	3.02"								
YA25L-2TC38-90	3			3/8"	1	.75"	.88"	.12"	2.14"								
YA26-2L	1			5/16"	7/8"	.83"	.94"	.12"	2.95"								
YA26-2L-45	2			5/16"	7/8"	.83"	.94"	.12"	2.84"								
YA26-2L-90	3			5/16"	7/8"	.83"	.94"	.12"	1.98"								
YA262LN	1			1/2"	1-3/4"	.83"	.94"	.12"	4.39"								
YA262LN-45	2			1/2"	1-3/4"	.83"	.94"	.12"	4.27"								
YA262LN-90	3			1/2"	1-3/4"	.83"	.94"	.12"	3.41"								
YA26L-2TC14	1			1/4"	5/8"	.83"	.94"	.12"	2.64"								
YA26L-2TC14-45	2			1/4"	5/8"	.83"	.94"	.12"	2.52"								
YA26L-2TC14-90	3			1/4"	5/8"	.83"	.94"	.12"	1.66"								
YA26L-2TC14E1	1			1/4"	1	.83"	.94"	.12"	3.01"								
YA26L-2TC14E1-45	2			1/4"	1	.83"	.94"	.12"	2.90"								
YA26L-2TC14E1-90	3			1/4"	1	.83"	.94"	.12"	2.04"								
YA26L-2TC14E2	1			1/4"	3/4"	.83"	.94"	.12"	2.76"								
YA26L-2TC14E2-45	2			1/4"	3/4"	.83"	.94"	.12"	2.65"								
YA26L-2TC14E2-90	3			1/4"	3/4"	.83"	.94"	.12"	1.79"								
YA26L-2TC38	1			3/8"	1	.83"	.94"	.12"	3.20"								
YA26L-2TC38-45	2			3/8"	1	.83"	.94"	.12"	3.09"								
YA26L-2TC38-90	3			3/8"	1	.83"	.94"	.12"	2.22"								
YA272LN	1			1/2"	1-3/4"	.91"	1.00"	.13"	4.48"								
YA272LN-45	2			1/2"	1-3/4"	.91"	1.00"	.13"	4.35"								
YA272LN-90	3			1/2"	1-3/4"	.91"	1.00"	.13"	3.44"								
YA27L-2TC14E2	1			1/4"	3/4"	.91"	1.00"	.12"	2.86"								
YA27L-2TC14E2-45	2			1/4"	3/4"	.91"	1.00"	.12"	2.73"								
YA27L-2TC14E2-90	3			1/4"	3/4"	.91"	1.00"	.12"	1.81"								
YA27L-2TC38	1			3/8"	1	.91"	1.00"	.12"	3.30"								
YA27L-2TC38-45	2			3/8"	1	.91"	1.00"	.12"	3.17"								
YA27L-2TC38-90	3			3/8"	1	.91"	1.00"	.12"	2.25"								

-- Color code not assigned.

▲ See tooling section of this catalog for complete tool and die listings.

◆ For applications greater than 2000 volts consult cable manufacturer for voltage stress relief instructions.

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™.

** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor