

Fittings for Metal Clad Cables Jacket over Armor

Features/Benefits:

- Slip-on design with no disassembly for easy installation
- Neoprene bushing for raintight seal
- Locknuts, bushings and flange gasket included - no additional materials to purchase
- Flange gasket prevents moisture penetration through threads
- Made from copper-free aluminum alloy for corrosion resistance
- Fits broad range - .351-4.62 cable O.D.

Application:

- For terminating metal clad cable


Certification:




Class II

To Order:

Determine satisfactory fit by checking cable dimensions A and B.
If cable dimensions do not fall within acceptable range, consult factory.

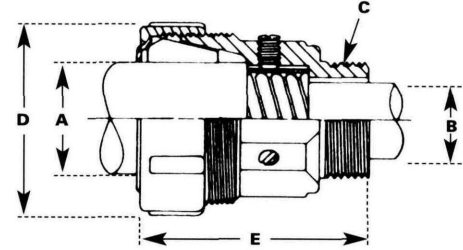

Catalog Number	Dimensions (Inches)						Ship Wt. (Lbs.)
	A		B	C	D	E	
	Dia. Over Jacket Min.	Max.	Max. Cable Core Dia.	Conduit Size	Fitting O.D.	Length Overall	
JAG 45-05	.35	.45	.61	1/2	1 5/8	2 1/4	1/4
JAG 55-05	.45	.55	.61	1/2	1 5/8	2 1/4	1/4
JAG 65-05	.55	.65	.61	1/2	1 5/8	2 1/4	1/4
JAG 75-05	.65	.75	.61	1/2	1 5/8	2 1/4	1/4
JAG 85-05	.75	.85	.61	1/2	1 5/8	2 1/4	1/4
JAG 95-05	.85	.95	.61	1/2	1 5/8	2 1/4	1/4
JAG 99-07	.85	.99	.81	3/4	2	2 5/8	1/3
JAG 107-07	.92	1.07	.81	3/4	2	2 1/4	1/3
JAG 113-07	.98	1.13	.81	3/4	2	2 1/4	1/3
JAG 121-07	1.07	1.21	.81	3/4	2	2 1/4	1/3
JAG 112-10	1.00	1.12	1.00	1	2 3/8	3 1/16	1/2
JAG 125-10	1.12	1.25	1.00	1	2 3/8	3 1/16	1/2
JAG 138-10	1.22	1.38	1.00	1	2 3/8	3 1/16	1/2
JAG 138-12	1.28	1.38	1.25	1 1/4	2 7/8	3 3/8	2/3
JAG 156-12	1.38	1.56	1.25	1 1/4	2 7/8	3 3/8	2/3
JAG 174-12	1.56	1.74	1.25	1 1/4	2 7/8	3 3/8	2/3
JAG 188-12	1.74	1.88	1.25	1 1/4	2 7/8	3 3/8	2/3
JAG 174-15	1.60	1.74	1.63	1 1/2	3 1/4	4 1/16	1
JAG 188-15	1.74	1.88	1.63	1 1/2	3 1/4	4 1/16	1
JAG 200-15	1.88	2.00	1.63	1 1/2	3 1/4	4 1/16	1
JAG 218-15	2.00	2.18	1.63	1 1/2	3 1/4	4 1/16	1
JAG 219-20	2.05	2.19	2.09	2	4	4 5/16	1 1/2
JAG 236-20	2.19	2.36	2.09	2	4	4 5/16	1 1/2
JAG 247-20	2.35	2.47	2.09	2	4	4 5/16	1 1/2
JAG 261-20	2.47	2.61	2.09	2	4	4 5/16	1 1/2
JAG 263-25	2.46	2.63	2.49	2 1/2	4 23/32	5 7/16	2 1/2
JAG 280-25	2.62	2.80	2.49	2 1/2	4 23/32	5 7/16	2 1/2
JAG 296-25	2.80	2.96	2.49	2 1/2	4 23/32	5 7/16	2 1/2
JAG 297-30	2.80	2.97	3.11	3	5 3/32	5 3/4	3
JAG 31 1-30	2.95	3.11	3.11	3	5 3/32	5 3/4	3
JAG 327-30	3.10	3.27	3.11	3	5 3/32	5 3/4	3
JAG 343-30	3.26	3.43	3.11	3	5 3/32	5 3/4	3
JAG 359-30	3.42	3.59	3.11	3	5 3/32	5 3/4	3
JAG 375-35	3.52	3.75	3.61	3 1/2	5 11/16	5 13/16	3 1/4
JAG 392-35	3.75	3.92	3.61	3 1/2	5 11/16	5 13/16	3 1/4
JAG 412-35	3.90	4.12	3.61	3 1/2	5 11/16	5 13/16	3 1/4
JAG 423-40	4.05	4.23	4.11	4	6 3/32	5 13/16	3 1/2
JAG 437-40	4.20	4.37	4.11	4	6 3/32	5 13/16	3 1/2
JAG 451-40	4.34	4.51	4.11	4	6 3/32	5 13/16	3 1/2
JAG 462-40	4.43	4.62	4.11	4	6 3/32	5 13/16	3 1/2

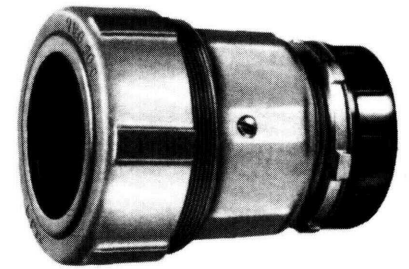

11A18