

LazrSPEED® Plenum Distribution Cable, interlocking aluminum armored with plenum jacket, 24 fiber single-unit


Product Classification

Portfolio	CommScope®
Product Type	Fiber indoor cable
Regional Availability	Asia Australia/New Zealand EMEA Latin America North America

Standards And Qualifications

Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-409
--------------------------------------	---------------------------------------

Representative Image

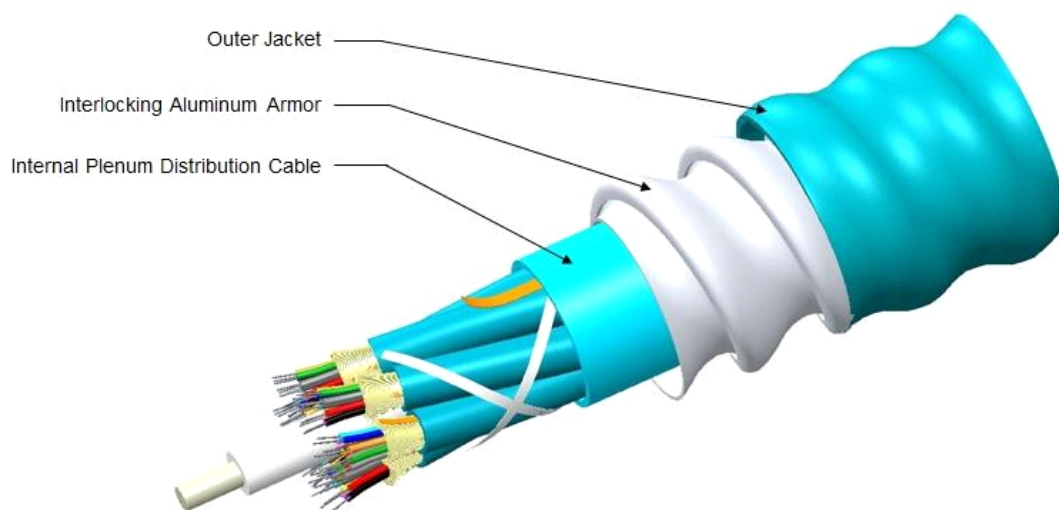

General Specifications

Cable Type	Distribution
Construction Type	Armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	OM3, LazrSPEED® 300
Total Fiber Count	24
Armor Type	Interlocking aluminum

Fiber Type	OM3, LazrSPEED® 300
Fiber Type, quantity	24
Jacket Color	Aqua

Dimensions

Cable Weight	206.0 lb/kft 307.0 kg/km
Diameter Over Armor	13.34 mm 0.53 in
Diameter Over Jacket	17.40 mm 0.69 in

Physical Specifications

Minimum Bend Radius, loaded	34.8 cm 13.7 in
Minimum Bend Radius, unloaded	24.4 cm 9.6 in
Tensile Load, long term, maximum	90 lbf 400 N
Tensile Load, short term, maximum	300 lbf 1335 N
Vertical Rise, maximum	133.0 m 436.4 ft

Flame Test Specifications

Flame Test Listing	NEC OFCP (ETL) and c(ETL)
Flame Test Method	NFPA 262

Environmental Specifications

Environmental Space	Plenum
Installation Temperature	0 °C to +70 °C (+32 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

Mechanical Test Specifications

Compression	485 lb/in 85 N/mm
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	25.80 ft lb 35.00 N-m
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7

Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



Included Products

CS-5L-TB (Product Component—not orderable) — LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable